

**Dk-Lok USA**

161 West I-65 Service Road

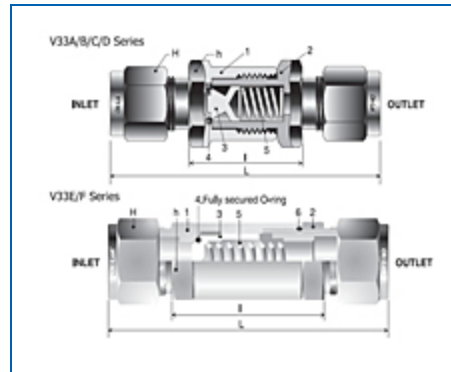
Mobile, AL 36608

Phone: (251) 472-9580**Fax:** (251) 450-0962 or (800) 287-8186info@dklokusa.com

Item # V33C-D-8T-1/3-S, V33 Series Poppet Check Valves

Features

- Fixed and adjustable cracking pressure.
- Reliable DK-LOK Tube Fitting, NPT and ISO pipe end connections.
- Stainless and Brass material construction.


[Specifications](#) | [Dimensions](#)

Specifications

Series	10.0 mm Orifice
End Connection	Dk-Lok
Size Inlet x Outlet	1/2" Dk-Lok x 1/2" Dk-Lok
Spring Nominal Cracking Pressure	1/3 psi (0.02 bar)
Min. Pressure	0
Max. Pressure	3 psig (0.21 bar)
Reseal Pressures	Up to 6 psig (0.41 bar) - Back Pressure
Valve Body Material	Stainless Steel 316

Seal Material

FKM

Spare Kit

None

Dimensions

Orifice

10.0

Cv

1.70

h-Hex

22.2 mm

L

80.2 mm

I

36.2 mm

H-Hex

22.2 mm