


Dial Gauge, Lug Back, ISO Type

Item number: 2044A

Images

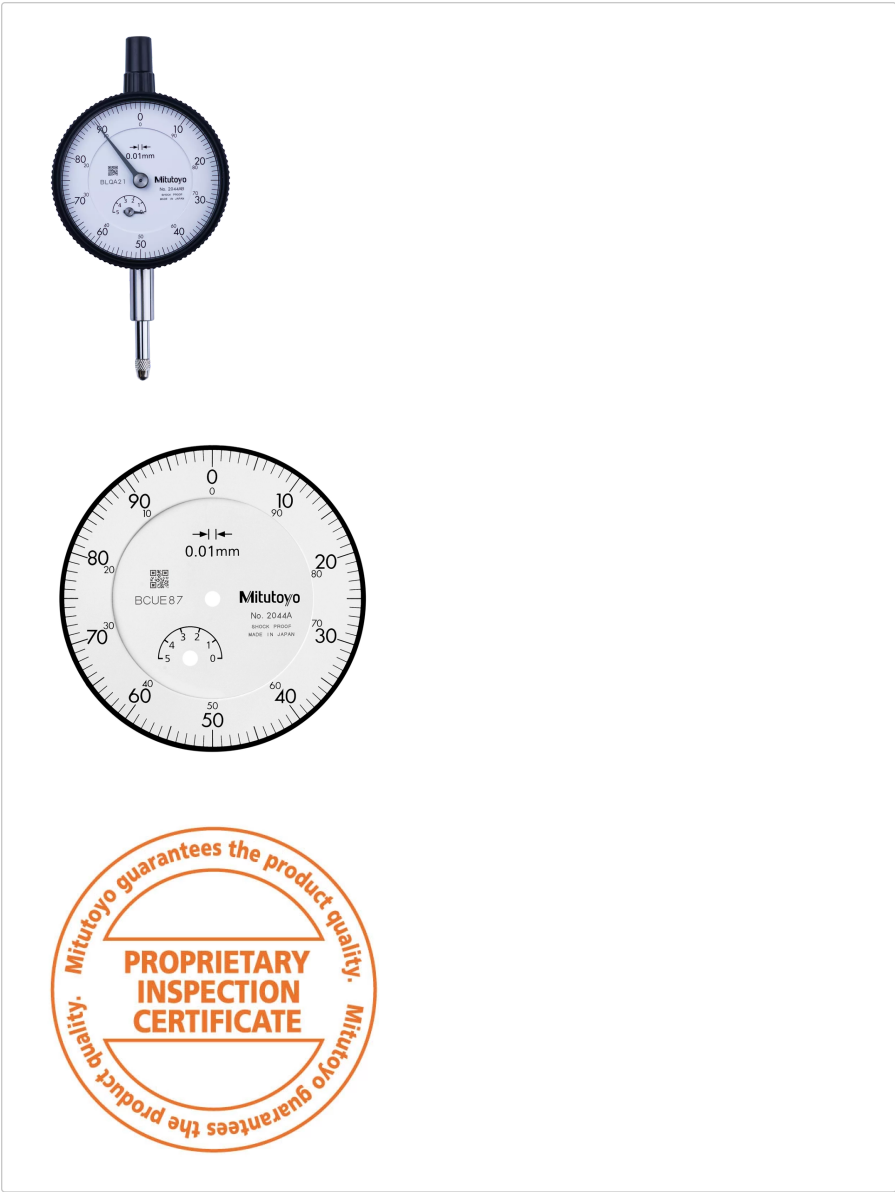

Description

Standard Type, 5 mm Range, 0,01 mm Graduation

This is a standard dial indicator with a bezel  $\varnothing$  57 mm. It offers you the following benefits:


- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Features

|                 |        |
|-----------------|--------|
| Digital/Analog: | Analog |
| Inch-Metric:    | Metric |

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| <b>Type:</b>                    | EN ISO Standard                         |
| <b>Range:</b>                   | 5 mm                                    |
| <b>Range per rev.:</b>          | 1 mm                                    |
| <b>Dial reading:</b>            | ±0-100                                  |
| <b>Graduation:</b>              | 0.01 mm                                 |
| <b>MPE any 1/10 revolution:</b> | 5 µm                                    |
| <b>MPE any 1/2 revolution:</b>  | 9 µm                                    |
| <b>MPE any 1 revolution:</b>    | 10 µm                                   |
| <b>MPE measuring range:</b>     | 12 µm                                   |
| <b>H MPE (Hysteresis):</b>      | 3 µm                                    |
| <b>R MPE (Repeatability):</b>   | 3 µm                                    |
| <b>Measuring force:</b>         | 0,4-1,4 N                               |
| <b>Stem:</b>                    | 8 mm                                    |
| <b>Contact point:</b>           | Carbide tipped, thread: M 2.5 x 0.45 mm |
| <b>Continuous dial:</b>         | Yes                                     |
| <b>Mass:</b>                    | 145 g                                   |
| <b>Delivered:</b>               | With certificate of inspection          |

## Dimensions

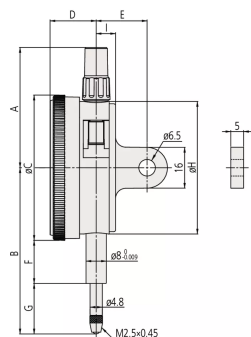

- A:** 47,2 mm
- B:** 65.2 mm
- C:** 57 mm
- D:** 18.1 mm
- E:** 20 mm
- F:** 16.9 mm
- G:** 19.8 mm
- H:** 52 mm
- I:** 7.6 mm

## Accessories

Optional accessories: