



Digital ABS AOS Caliper

Item number: 500-196-30

Images



Description


A Mitutoyo digital caliper equipped with standard outside and inside jaws. Hardened stainless steel construction and equipped with the latest electromagnetic ABSOLUTE AOS System scale for error free, high-speed measurement.

Specification

Model:	CD-6"ASX
Range:	0-6" / 0-150 mm
Depth bar:	flat
Thumb roller:	Yes
Data output:	No
Max. Permissible Error E MPE:	±0.001" / ±0.02 mm
Max. Permissible Error S MPE:	±0.002" / ±0.04 mm
Digital step:	0.0005" / 0.01 mm
Max. response speed:	Unlimited
Display:	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
ORIGIN (ABS-Zero):	Yes
ON/OFF:	Yes

ABS / INC (INC ZERO):	Yes
Low voltage alarm:	Yes
Battery life:	Approx. 5 years under normal use
Mass:	168 g
Delivered:	Including box, SR44 battery, certificate of inspection

Dimensions

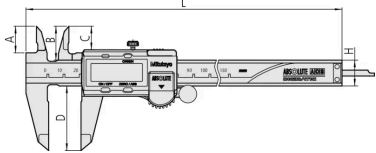

The image is a technical line drawing of a Mitutoyo Digital ABS AOS Caliper. The drawing shows the caliper from a side-on perspective, highlighting its various components and measurement points. Dimension lines with letters A through H are used to specify key measurements: L is the total length, A is the width of the main body, B is the width of the lower jaw, C is the width of the upper jaw, D is the height of the lower jaw, and H is the height of the main body. The drawing is detailed, showing the digital display, adjustment screws, and the overall shape of the tool.

L: 233 mm

A: 16.5 mm

B: 21 mm

C: 14.5 mm

D: 40 mm

H: 16 mm