



Digital ABS AOS Caliper

Item number: 500-197-30

Images



Description


A Mitutoyo digital caliper equipped with standard outside and inside jaws. Hardened stainless steel construction and equipped with the latest electromagnetic ABSOLUTE AOS System scale for error free, high-speed measurement.

Specification

Model:	CD-8"ASX
Range:	0-8" / 0-200 mm
Depth bar:	flat
Thumb roller:	Yes
Data output:	No
Max. Permissible Error E MPE:	±0.001" / ±0.02 mm
Max. Permissible Error S MPE:	±0.002" / ±0.04 mm
Digital step:	0.0005" / 0.01 mm
Max. response speed:	Unlimited
Display:	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
ORIGIN (ABS-Zero):	Yes
ON/OFF:	Yes
ABS / INC (INC ZERO):	Yes
Low voltage alarm:	Yes
Battery life:	Approx. 5 years under normal use
Mass:	198 g

Delivered:	Including box, SR44 battery, certificate of inspection
-------------------	--

Dimensions

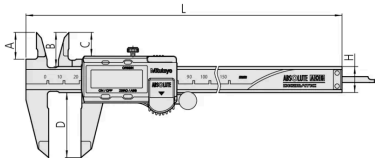

The image shows a technical drawing of a Mitutoyo Digital ABS AOS Caliper. The drawing includes several dimension lines labeled with letters: L (overall length), A (width of the head), B (width of the beam), C (width of the frame), D (width of the jaws), and H (height of the frame). The caliper is shown in a side profile view, highlighting its digital display and adjustment mechanisms.

L: 290 mm

A: 20 mm

B: 24.5 mm

C: 18 mm

D: 50 mm

H: 16 mm