




## Inductive sensor NBB2-V3-E2-2M-PVC

- Basic series
- 2 mm flush
- 3-wire DC



### Dimensions

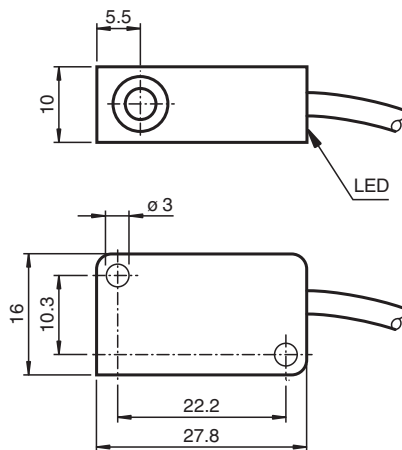

### Technical Data

#### General specifications

|                            |       |                    |
|----------------------------|-------|--------------------|
| Switching function         |       | Normally open (NO) |
| Output type                |       | PNP                |
| Rated operating distance   | $s_n$ | 2 mm               |
| Installation               |       | flush              |
| Output polarity            |       | DC                 |
| Assured operating distance | $s_a$ | 0 ... 1.62 mm      |
| Reduction factor $r_{Al}$  |       | 0.35               |
| Reduction factor $r_{Cu}$  |       | 0.2                |
| Reduction factor $r_{304}$ |       | 0.7                |
| Output type                |       | 3-wire             |

#### Nominal ratings

|                             |       |                            |
|-----------------------------|-------|----------------------------|
| Operating voltage           | $U_B$ | 10 ... 30 V DC             |
| Switching frequency         | $f$   | 0 ... 1000 Hz              |
| Reverse polarity protection |       | reverse polarity protected |
| Short-circuit protection    |       | pulsing                    |
| Voltage drop                | $U_d$ | $\leq 3$ V                 |

Release date: 2026-03-05 Date of issue: 2026-03-05 Filename: 915902\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

## Technical Data

|                                                 |       |                                                                                                                                                                                         |
|-------------------------------------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating current                               | $I_L$ | 0 ... 100 mA                                                                                                                                                                            |
| Off-state current                               | $I_r$ | 0 ... 0.5 mA typ. 0.1 $\mu$ A at 25 °C                                                                                                                                                  |
| No-load supply current                          | $I_0$ | $\leq$ 15 mA                                                                                                                                                                            |
| Switching state indicator                       |       | LED, yellow                                                                                                                                                                             |
| <b>Safety-relevant product characteristics</b>  |       |                                                                                                                                                                                         |
| MTTF <sub>d</sub>                               |       | 3560 a                                                                                                                                                                                  |
| Mission Time (T <sub>M</sub> )                  |       | 20 a                                                                                                                                                                                    |
| Diagnostic Coverage (DC)                        |       | 0 %                                                                                                                                                                                     |
| <b>Compliance with standards and directives</b> |       |                                                                                                                                                                                         |
| Standard conformity                             |       |                                                                                                                                                                                         |
| Standards                                       |       | EN IEC 60947-5-2                                                                                                                                                                        |
| <b>Approvals and certificates</b>               |       |                                                                                                                                                                                         |
| UL approval                                     |       | cULus Listed<br>Load Type: General Purpose<br>Circuitry: Class 2 Power Source<br>Enclosure Type Rating: Type 1<br>Supply/Switching Voltage: 30 V DC<br>Output Switching Current: 100 mA |
| CSA approval                                    |       | cCSAus Listed, General Purpose                                                                                                                                                          |
| <b>Ambient conditions</b>                       |       |                                                                                                                                                                                         |
| Ambient temperature                             |       | -25 ... 70 °C (-13 ... 158 °F)                                                                                                                                                          |
| <b>Mechanical specifications</b>                |       |                                                                                                                                                                                         |
| Connection type                                 |       | cable                                                                                                                                                                                   |
| Housing material                                |       | PBT                                                                                                                                                                                     |
| Sensing face                                    |       | PBT                                                                                                                                                                                     |
| Degree of protection                            |       | IP67                                                                                                                                                                                    |
| Cable                                           |       |                                                                                                                                                                                         |
| Wire end ferrules                               |       | yes                                                                                                                                                                                     |
| Cable diameter                                  |       | 3 mm + 0.3 mm                                                                                                                                                                           |
| Bending radius                                  |       | > 10 x cable diameter                                                                                                                                                                   |
| Material                                        |       | PVC                                                                                                                                                                                     |
| Color                                           |       | grey                                                                                                                                                                                    |
| Number of cores                                 |       | 3                                                                                                                                                                                       |
| Core cross section                              |       | 0.14 mm <sup>2</sup>                                                                                                                                                                    |
| Length                                          | L     | 2 m                                                                                                                                                                                     |
| Tightening torque, fastening screws             |       | $\leq$ 0.4 Nm                                                                                                                                                                           |
| Dimensions                                      |       |                                                                                                                                                                                         |
| Height                                          |       | 10.2 mm                                                                                                                                                                                 |
| Width                                           |       | 27.8 mm                                                                                                                                                                                 |
| Length                                          |       | 16 mm                                                                                                                                                                                   |

## Connection Assignment

