


**Dk-Lok USA**

161 West I-65 Service Road

Mobile, AL 36608

**Phone:** (251) 472-9580


**Fax:** (251) 450-0962 or (800) 287-8186

[info@dklokusa.com](mailto:info@dklokusa.com)

## Item # V86A-F-6N-PK-S, V86 Series Ball Valves, VC86 Series CNG/NGV Ball Valves

### Features

- High pressure up to 10 000 psi (689 bar).
- Blowout proof design with internally loaded stem.
- Handle indicates the flow direction.
- Positive stop with a robust stop pin.
- High flow rate with maximum orifice.
- Various end ports including DK-LOK tube port.
- Various flow control with side and bottom inletport on 3-way diverter valves.

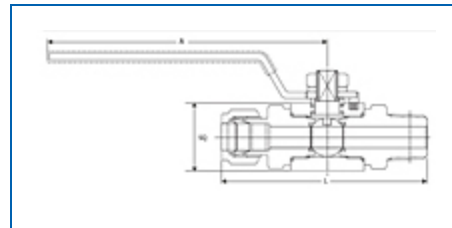

### [Specifications](#) | [Dimensions](#)

#### Specifications

<b>Directional Control</b>	2-Way On-Off Valve
<b>Valve Type</b>	Standard Valve
<b>Series</b>	V86A
<b>Body Material</b>	Stainless Steel 316
<b>End Connection</b>	Female NPT
<b>Size Inlet x Outlet</b>	3/8" Female NPT x 3/8" Female NPT

<b>Seat Material</b>	PEEK
<b>Panel Mounting</b>	available
<b>Locking Device</b>	availble
<b>Handle</b>	Lever Handle

## Dimensions

<b>Orifice</b>	10.0 mm
<b>Cv</b>	7.5
<b>A</b>	108.3 mm
<b>H</b>	38.4 mm
<b>L</b>	77.0 mm
<b>SQ</b>	32.0 mm
<b>Panel Hole Drill</b>	30.0 mm
<b>Panel Thickness (Max.)</b>	4.0 mm