

TXY/XYQ SERIES | *Muffler*



Muffler are used in refrigerating systems such as household air conditioners or commercial air conditioners. Muffler are installed in discharge line or other pipes with vibration and noise to eliminate and alleviate noises.

FEATURES

- CORROSION RESISTANT: FINISHED WITH EPOXY POWDER PAINTING
- EXCELLENT ANTI-SHOCK AND ANTI-VIBRATION PERFORMANCE WITH STEEL OR COPPER CASING


GENERAL SPECIFICATION

- Applicable refrigerant: R22, R410A and R407C
- Medium temperature: -22°F ~ +240°F
- Ambient temperature min./max.: -22°F ~ +131°F
- Maximum working pressure: 4.8MPa• Installation position:
- Certifications: UL, CSA SA12099

TXY/XYQ SERIES | Muffler

TECHNICAL PARAMETERS

REGULAR STEEL MUFFLER

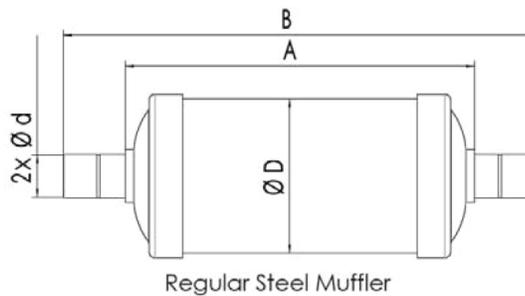


Model	Connections (Ød)	B	A	Shell ØD
TXY-A05020-901	1/4" ODF	4.41"	2.91"	2.56"
TXY-A05030-901	3/8" ODF	4.41"	2.91"	2.56"
TXY-A05040-901	1/2" ODF	4.80"	2.91"	2.56"
TXY-A05050-901	5/8" ODF	4.80"	2.91"	2.56"
TXY-A08020-901	1/4" ODF	5.24"	3.74"	2.56"
TXY-A08030-901	3/8" ODF	5.24"	3.74"	2.56"
TXY-A08040-901	1/2" ODF	5.63"	3.74"	2.56"
TXY-A08050-901	5/8" ODF	5.63"	3.74"	2.56"
TXY-A16030-901	3/8" ODF	6.06"	4.57"	2.99"
TXY-A16040-901	1/2" ODF	6.46"	4.57"	2.99"
TXY-A16050-901	5/8" ODF	6.46"	4.57"	2.99"
TXY-A16070-901	7/8" ODF	6.93"	4.57"	2.99"
TXY-A30030-901	3/8" ODF	8.98"	7.48"	2.99"
TXY-A30040-901	1/2" ODF	9.37"	7.48"	2.99"
TXY-A30050-901	5/8" ODF	9.37"	7.48"	2.99"
TXY-A30060-901	3/4" ODF	9.84"	7.48"	2.99"
TXY-A30070-901	7/8" ODF	9.84"	7.48"	2.99"
TXY-A30090-901	1-1/8" ODF	10.24"	7.48"	2.99"

TXY/XYQ SERIES | Muffler

TECHNICAL PARAMETERS CONTINUED


SPUN STEEL MUFFLER

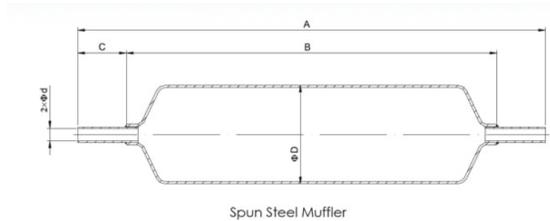

Spun Steel Muffler

Model	Connections (ϕd)	A	B	Tube ϕD
XYQ-Fxx025	1/4", 3/8", 1/2"	4.72" to 17.72"	2.76" to 12.99"	1.00"
XYQ-Fxx031	1/4", 3/8", 1/2"	4.72" to 17.72"	2.76" to 12.99"	1.25"
XYQ-Fxx035	1/4", 3/8", 1/2"	4.72" to 17.72"	2.76" to 12.99"	1.38"
XYQ-Fxx040	1/4", 3/8", 1/2"	4.72" to 17.72"	2.76" to 12.99"	1.57"
XYQ-Fxx048	1/4", 3/8", 1/2"	4.72" to 17.72"	3.54" to 12.99"	1.89"
XYQ-Fxx050	1/4", 3/8", 1/2"	4.72" to 17.72"	3.54" to 12.99"	1.97"
XYQ-Fxx065	1/4", 3/8", 1/2"	4.72" to 17.72"	5.12" to 12.99"	2.56"

SPUN COPPER MUFFLER

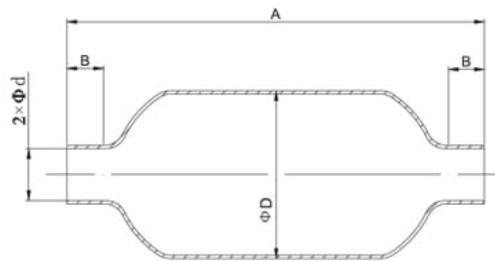

Spun Copper Muffler

Model	Connections (ϕd)	A	B	Tube ϕD
XYQ-Cxx025	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.00"
XYQ-Cxx030	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.18"
XYQ-Cxx031	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.25"
XYQ-Cxx035	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.38"
XYQ-Cxx041	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.63"
XYQ-Cxx048	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.89"
XYQ-Cxx050	1/4", 3/8", 1/2"	2.76" to 12.99"	0.200" to 0.554"	1.97"